

Technical information

Testing and Operating Pressures

Henrad Column Range has been independently tested to ensure these radiators perform to a maximum working pressure of 8 bar.

Connections

Each radiator comes with 1/2" inlet connections as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL A9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.


Warranty

Henrad Column Range come with a 5 year manufacturer's warranty.

Henrad Column

Wall Mounting Information

All dimensions in mm.

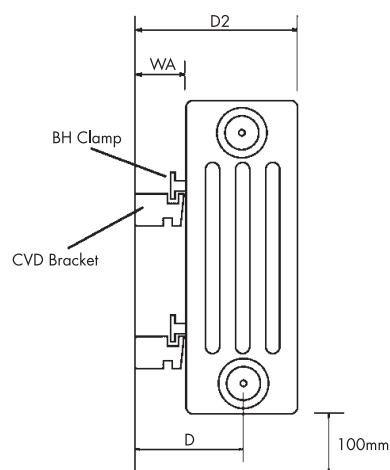

Measurements using 10mm CVD Bracket Slot
(add 5mm if using 15mm Slot)

	WA	D	D2
2 Column	23	54	85
3 Column	23	73	123
4 Column	23	91	159

Accessories

- 163061 Wall bracket retaining spring
- 163062 Wall bracket clamp for classic column
- 148137 Column feet set for 2, 3 & 4 column