HENRAD

Technical Data
Compact

Technical information

Testing and Operating Pressures
Henrad Compact Range has been independently tested to ensure these radiators perform to a maximum working pressure of 10 bar.

Connections
Henrad Compact has 4 x ½" BSP connections as standard.

Paint Process
Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL A9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

Water Treatment
Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty
Henrad Compact Range comes with a 10 year manufacturer's warranty.

Henrad (UK) Limited, Marriott Road,
Mexborough, South Yorkshire S64 8BN.
Telephone: 0844 543 6200 Facsimile: 0844 543 6300

www.henrad.co.uk

Henrad Compact

Wall Mounting Information
All dimensions in mm.

T11 T21 T22

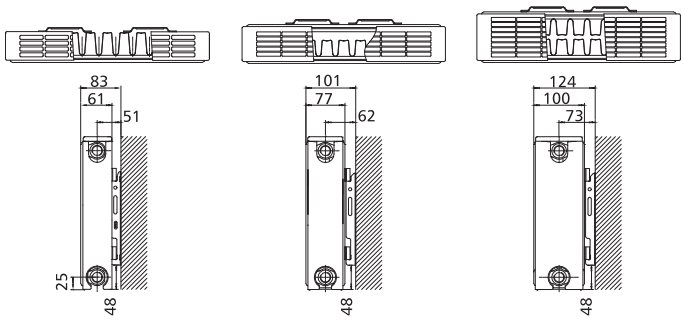

Mounting Bracket Information
All dimensions in mm.

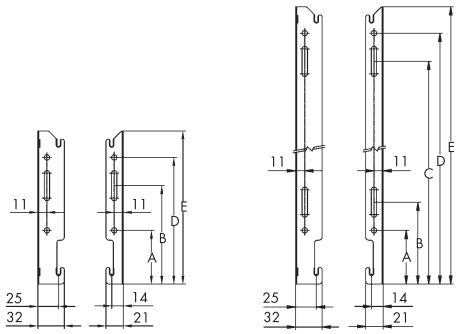

All dimensions in mm.					
Height	300	450	500	600	700
A	65	65	65	65	65
B	119	99	99	99	99
C	-	269	319	419	519
D	153	303	333	453	553
E	185	335	385	485	585

T11, T21 & T22 Lug Positions
All dimensions in mm.



Panel Height	D
mm	mm
300	155
450	305
600	455
700	555

T21 & T22 Dimensions	mm	T11 Dimensions	mm
A	133	A 400mm	117
B	60	A 500 - 3000mm	150
		B 400 - 3000mm	60
		C 1800 - 3000mm	17