

## Compact K3

Triple Convactor Type 33

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
600	400	2063304	956	3262
	500	2063305	1195	4077
	600	2063306	1433	4889
	700	2063307	1672	5705
	800	2063308	1911	6520
	900	2063309	2150	7336
	1000	2063310	2389	8151
	1100	2063311	2628	8967
	1200	2063312	2867	9782
	1400	2063314	3345	11413

Btu/hr @  $\Delta t 50^{\circ}\text{C}$

Working pressure:  
Tested to withstand 10.0 bar



For technical and installation  
information visit our website  
[www.henrad.co.uk/downloads](http://www.henrad.co.uk/downloads)



### Technical information

#### Testing and Operating Pressures

Henrad Compact K3 has been independently tested to ensure these radiators perform to a maximum working pressure of 10.0 bar.

#### Connections

Henrad Compact K3 has 4 x 1/2" BSP connections as standard.

#### Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL 9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

#### Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

#### Warranty

Henrad Compact K3 comes with a 10 year manufacturer's warranty.


Henrad (UK) Limited, Marriott Road,  
Mexborough, South Yorkshire S64 8BN.  
Telephone: 0800 876 6813

[www.henrad.co.uk](http://www.henrad.co.uk)

### Henrad Compact K3




#### Wall Mounting Information

All dimensions in mm.

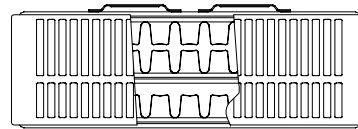


#### Mounting Bracket Information

All dimensions in mm.

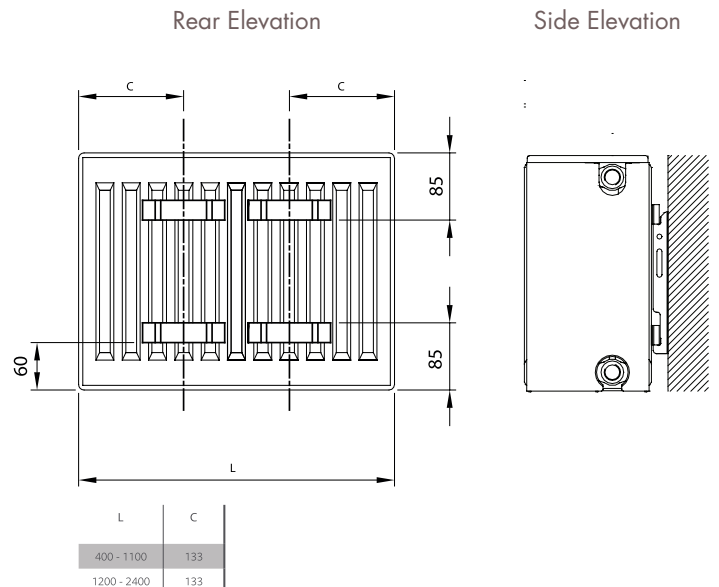

#### COMPACT K3 Lug Positions

All dimensions in mm.



Dimensions	
A	133mm
B	600mm