



## Verona Vertical Single

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
<b>1800</b>	444	248340	852	2907
	592	248341	1136	3876
	740	248342	1420	4845
<b>2000</b>	444	248343	942	3214
	592	248344	1256	4286
	740	248345	1570	5357

Btu/hr @  $\Delta t50^{\circ}\text{C}$

## Verona Vertical Double

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
<b>1800</b>	444	248640	1254	4279
	592	248641	1672	5705
	740	248642	2090	7131
<b>2000</b>	444	248643	1386	4729
	592	248644	1848	6306
	740	248645	2310	7882

Btu/hr @  $\Delta t50^{\circ}\text{C}$

Working pressure:  
Tested to withstand 4.0 bar



For technical and installation  
information visit our website  
[www.henrad.co.uk/downloads](http://www.henrad.co.uk/downloads)



## Technical information

### Testing and Operating Pressures

Henrad Verona Vertical has been independently tested to ensure radiators perform to a maximum working pressure of 4.0 bar.

### Connections

Henrad Verona Vertical has 2 x 1/2" BSP connections (BOE) as standard.

### Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL 9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

### Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.



### Warranty

Henrad Verona Vertical comes with a 5 year manufacturer's warranty.

## Henrad Verona Vertical

### Wall Mounting Information

All dimensions in mm.

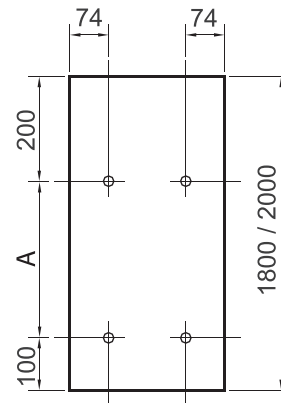

Height	Width	A
1800	444	1500
1800	592	1500
1800	740	1500
2000	444	1700
2000	592	1700
2000	740	1700

