



Technical Data Verona Slimline

Technical information

Testing and Operating Pressures

Henrad Verona Slimline has been independently tested to ensure radiators perform to a maximum working pressure of 4.0 bar.

Connections

Henrad Verona Slimline has $2 \times 1/2$ " BSP connections (BOE) as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL 9016) which is stoved and cooled to give a perfect finish.

All radiators are illustrated in Traffic white unless stated.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty


Henrad Verona Slimline comes with a 5 year manufacturer's warranty.

Henrad Verona Slimline

Wall Mounting Information


All dimensions in mm. inches in brackets.

Туре	Back face to finished wall	Connection centres from finished wall	Front face from finished wall
	D	D1	D2
Slimline Concept	35 (1.38)	50 (1.97)	130 (5.12)

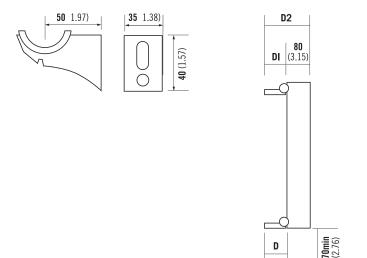

Fixing Positions

All dimensions in mm. inches in brackets.



Henrad (UK) Limited, Marriott Road, Mexborough, South Yorkshire S64 8BN. Telephone: 0800 876 6813

Colour Range

Standard Colour

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.



RAL 9016 Traffic white

RAL Colour



Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

Colour Range

RAL Colour



Metallic



