

Como Stainless Steel

| Height mm | Length mm | Henrad Code | Heat emissions | |
|--------------|--------------|----------------|----------------|--------|
| | | | Watts | Btu/hr |
| 750 | 500 | 720001 | 247 | 843 |
| 1000 | 500 | 720002 | 306 | 1044 |
| 1200 | 500 | 720003 | 341 | 1164 |
| 1500 | 500 | 720004 | 421 | 1437 |


Btu/hr @ $\Delta t 50^{\circ}\text{C}$

5 Year
Warranty

IN
STOCK

Tested to
withstand
4.0
bar

For technical and installation information
visit our website www.henrad.co.uk/downloads

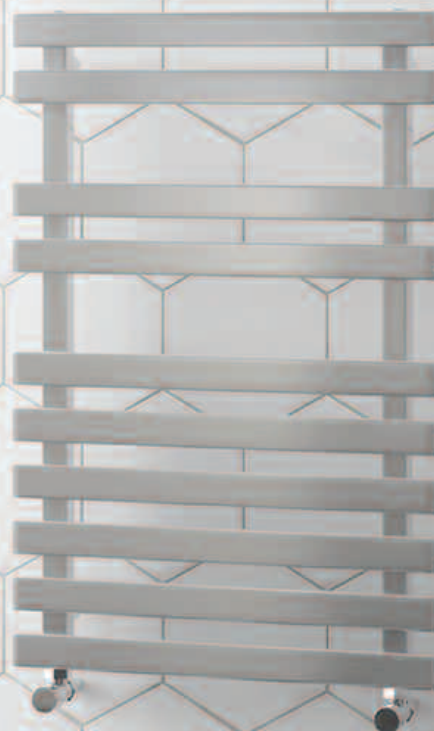

Technical information

Testing and Operating Pressures

Henrad Como Stainless Steel has been independently tested to ensure these radiators perform to a maximum working pressure of 4.0 bar.

Finish

Brushed Stainless Steel.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty

Henrad Como Stainless Steel comes with a 5 year manufacturer's warranty.

Wall Mounting Information

All dimensions in mm.

Place your radiator at least 12.5cm above the floor.

Provide insulation by wrapping PTFE tape on the treads before installing the valves.

Apply silicone seal fluid to all treated parts containing o-rings.

Connect your radiator to the utilities after following all the installation steps in the manual.

After connecting to the utilities, do not forget to discharge the trapped air inside the radiator.

