



Verona Slimline Concept

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
1800	320	248658	872	2976
	440	248659	1199	4092
	520	248660	1417	4836
	640	248661	1744	5952

Btu/hr @ $\Delta t 50^{\circ}\text{C}$

Working pressure:
Tested to withstand 4.0 bar



For technical and installation
information visit our website
www.henrad.co.uk/downloads



Verona Slimline Concept is only available
in Slate grey RAL A7015.

Technical information

Testing and Operating Pressures

Henrad Verona Slimline Concept has been independently tested to ensure these radiators perform to a maximum working pressure of 4.0 bar.

Connections

Henrad Verona Slimline Concept has 2 x 1/2" BSP connections (BOE) as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Slate grey (RAL A7015) which is stoved and cooled to give a perfect finish.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty


Henrad Verona Slimline Concept comes with a 5 year manufacturer's warranty.

Henrad Verona Slimline Concept

Wall Mounting Information

All dimensions in mm. inches in brackets.

Type	Back face to finished wall D	Connection centres from finished wall D1	Front face from finished wall D2
Slimline Concept	35 (1.38)	50 (1.97)	130 (5.12)

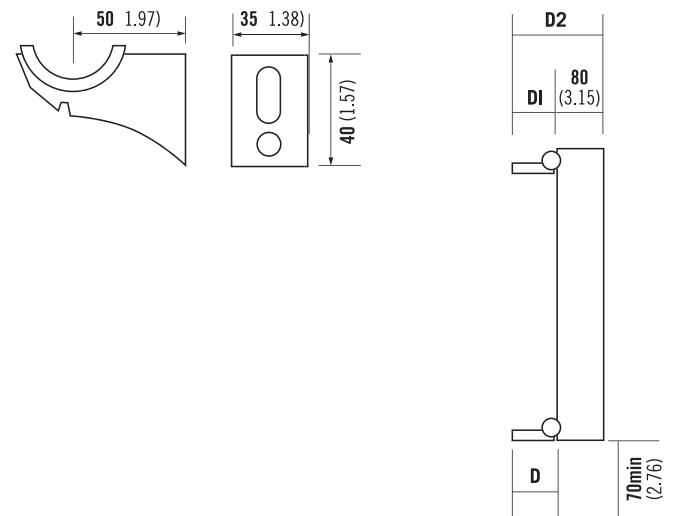

Fixing Positions

All dimensions in mm. inches in brackets.

