



Silhouette Type 11

Working pressure:
Tested to withstand 8.0 bar

For technical and installation
information visit our website
www.henrad.co.uk/downloads



NEW Silhouette

Single Convector Type 11

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
300	500	98301105	235	802
	1000	98301110	470	1604
	1500	98301115	705	2405
500	400	98501104	298	1018
	600	98501106	448	1527
	800	98501108	597	2036
	1000	98501110	746	2545
	1200	98501112	895	3054
	1400	98501114	1044	3563
	1600	98501116	1194	4073
600	1800	98501118	1343	4582
	400	98601104	348	1187
	600	98601106	522	1781
	800	98601108	696	2375
	1000	98601110	870	2968
	1200	98601112	1044	3562
	1400	98601114	1218	4156
	1600	98601116	1392	4750
	1800	98601118	1566	5343
2000	98601120	1740	5937	

Btu/hr @ $\Delta t 50^{\circ}\text{C}$

NEW Silhouette

Double Convector Type 22

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
300	500	98302205	449	1532
	1000	98302210	898	3064
	1500	98302215	1347	4596
500	400	98502204	555	1894
	600	98502206	833	2842
	800	98502208	1110	3789
	1000	98502210	1388	4736
	1200	98502212	1666	5683
	1400	98502214	1943	6630
	1600	98502216	2221	7577
	1800	98502218	2498	8525
600	400	98602204	640	2185
	600	98602206	961	3278
	800	98602208	1281	4370
	1000	98602210	1601	5463
	1200	98602212	1921	6555
	1400	98602214	2241	7648
	1600	98602216	2562	8740
	1800	98602218	2882	9833
2000	98602220	3202	10925	

Btu/hr @ $\Delta t 50^{\circ}\text{C}$

Technical information

Testing and Operating Pressures

Henrad Silhouette has been independently tested to ensure these radiators perform to a maximum working pressure of 8.0 bar.

Connections

Henrad Silhouette has 4 x 1/2" BSP connections as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL A9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty

Henrad Silhouette comes with a 5 year manufacturer's warranty.

Henrad (UK) Limited, Marriott Road,
Mexborough, South Yorkshire S64 8BN.
Telephone: 0844 543 6200 Facsimile: 0844 543 6300


www.henrad.co.uk

Henrad Silhouette


Wall Mounting Information

All dimensions in mm.

T11

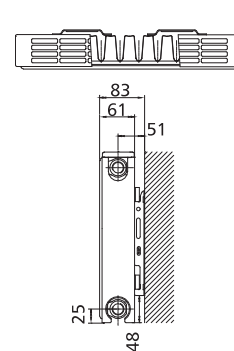


T22

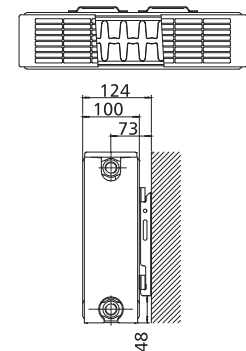

Mounting Bracket Information


All dimensions in mm.

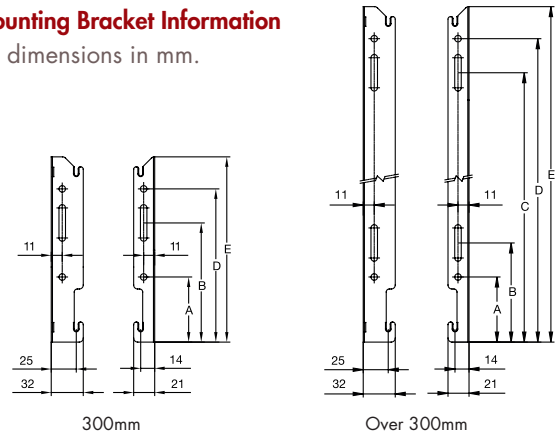

All dimensions in mm.		
Height	500	600
A	65	65
B	99	99
C	319	419
D	333	453
E	385	485

T11 & T22 Lug Positions

All dimensions in mm.



Panel Height	D
mm	mm
500	355
600	455

T22	T11
Dimensions	Dimensions
mm	mm
A 133	A 400mm 117
B 60	A 500 - 3000mm 150
	B 400 - 3000mm 60
	C 1800 - 3000mm 17