

Silhouette Single Convector Type 11

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
300	500	98301105	235	802
	1000	98301110	470	1604
	1500	98301115	705	2405
500	400	98501104	298	1018
	600	98501106	448	1527
	700	98501107	522	1782
	800	98501108	597	2036
	900	98501109	671	2289
	1000	98501110	746	2545
	1100	98501111	821	2801
	1200	98501112	895	3054
	1400	98501114	1044	3563
	1600	98501116	1194	4073
	1800	98501118	1343	4582
600	400	98601104	348	1187
	600	98601106	522	1781
	700	98601107	609	2078
	800	98601108	696	2375
	900	98601109	783	2672
	1000	98601110	870	2968
	1100	98601111	957	3265
	1200	98601112	1044	3562
	1400	98601114	1218	4156
	1600	98601116	1392	4750
	1800	98601118	1566	5343
2000	98601120	1740	5937	

Btu/hr @ $\Delta t50^{\circ}\text{C}$

Silhouette Double Convactor Type 22

Height mm	Length mm	Henrad Code	Heat emissions	
			Watts	Btu/hr
300	500	98302205	449	1532
	1000	98302210	898	3064
	1500	98302215	1347	4596
500	400	98502204	555	1894
	600	98502206	833	2842
	700	98502207	972	3316
	800	98502208	1110	3789
	900	98502209	1249	4262
	1000	98502210	1388	4736
	1100	98502211	1527	5210
	1200	98502212	1666	5683
	1400	98502214	1943	6630
	1600	98502216	2221	7577
	1800	98502218	2498	8525
600	400	98602204	640	2185
	600	98602206	961	3278
	700	98602207	1121	3825
	800	98602208	1281	4370
	900	98602209	1441	4917
	1000	98602210	1601	5463
	1100	98602211	1761	6009
	1200	98602212	1921	6555
	1400	98602214	2241	7648
	1600	98602216	2562	8740
	1800	98602218	2882	9833
2000	98602220	3202	10925	

Btu/hr @ $\Delta t50^{\circ}\text{C}$



Silhouette Type 11

5 Year Warranty

IN STOCK

Tested to withstand 10.0 bar

For technical and installation information
visit our website www.henrad.co.uk/downloads

Have you considered
Plan?

Technical information

Testing and Operating Pressures

Henrad Silhouette has been independently tested to ensure these radiators perform to a maximum working pressure of 10.0 bar.

Connections

Henrad Silhouette has 4 x 1/2" BSP connections as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL A9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty

Henrad Silhouette comes with a 5 year manufacturer's warranty.

Henrad (UK) Limited, Marriott Road,
Mexborough, South Yorkshire S64 8BN.
Telephone: 0800 876 6813


www.henrad.co.uk

Henrad Silhouette


Wall Mounting Information

All dimensions in mm.

T11

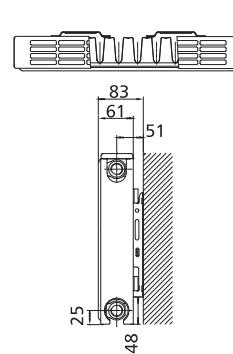


T22

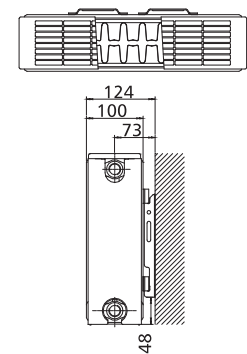


Mounting Bracket Information

All dimensions in mm.



300mm

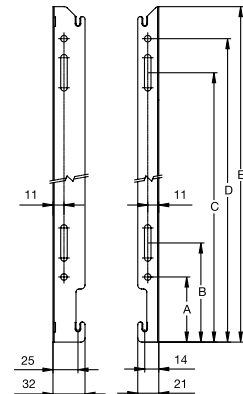


Over 300mm

All dimensions in mm.		
Height	500	600
A	65	65
B	99	99
C	319	419
D	333	453
E	385	485

T11 & T22 Lug Positions

All dimensions in mm.



Panel Height D	
mm	mm
500	355
600	455

T22		T11	
Dimensions	mm	Dimensions	mm
A	133	A 400mm	117
B	60	A 500 - 3000mm	150
		B 400 - 3000mm	60
		C 1800 - 3000mm	17