

Technical Data Verona Slimline Concept





Technical Data Verona Slimline Concept

Technical information

Testing and Operating Pressures

Henrad Verona Slimline Concept has been independently tested to ensure these radiators perform to a maximum working pressure of 4.0 bar.

Connections

Henrad Verona Slimline Concept has $2 \times 1/2$ " BSP connections (BOE) as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Slate grey (RAL A7015) which is stoved and cooled to give a perfect finish.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty


Henrad Verona Slimline Concept comes with a 5 year manufacturer's warranty.

Henrad Verona Slimline Concept

Wall Mounting Information


All dimensions in mm. inches in brackets.

Туре	Back face to finished wall	Connection centres from finished wall	Front face from finished wall
	D	D1	D2
Slimline Concept	35 (1.38)	50 (1.97)	130 (5.12)

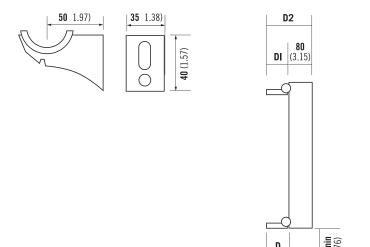

Fixing Positions

All dimensions in mm. inches in brackets.



Henrad (UK) Limited, Marriott Road, Mexborough, South Yorkshire S64 8BN. Telephone: 0800 876 6813