

Everest Line Type 11



Working pressure:  
Tested to withstand 8.0 bar



For technical and installation  
information visit our website  
[www.henrad.co.uk/downloads](http://www.henrad.co.uk/downloads)



**Everest Line** Single Convector Type 11

Height mm	Length mm	Henrad Code	Heat emissions		Henrad Price
			Watts	Btu/hr	
300	500	3031105	235	802	£85.62
	1000	3031110	469	1601	£123.97
	1500	3031115	704	2401	£171.92
500	400	3051104	298	1017	£89.29
	600	3051106	448	1530	£98.87
	800	3051108	598	2040	£118.06
	1000	3051110	746	2545	£137.25
	1200	3051112	897	3060	£156.43
	1400	3051114	1046	3570	£175.61
	1600	3051116	1194	4075	£194.80
600	1800	3051118	1343	4584	£213.97
	400	3061104	348	1188	£92.98
	600	3061106	522	1782	£112.16
	800	3061108	696	2375	£131.34
	1000	3061110	870	2969	£150.53
	1200	3061112	1044	3563	£169.72
	1400	3061114	1219	4158	£188.88
	1600	3061116	1392	4751	£208.08
	1800	3061118	1566	5345	£227.26
	2000	3061120	1741	5939	£246.43

Btu/hr @  $\Delta t50^{\circ}\text{C}$

Everest Line Type 22



Have you considered  
**Plan?**

**Everest Line** Double Convector Type 22

Height mm	Length mm	Henrad Code	Heat emissions		Henrad Price
			Watts	Btu/hr	
300	500	3032205	465	1587	£115.87
	1000	3032210	929	3171	£163.82
	1500	3032215	1394	4756	£211.78
500	400	3052204	555	1894	£132.82
	600	3052206	833	2843	£152.01
	800	3052208	1110	3788	£171.19
	1000	3052210	1388	4737	£190.38
	1200	3052212	1666	5686	£209.55
	1400	3052214	1943	6631	£228.74
	1600	3052216	2222	7580	£247.92
	1800	3052218	2499	8526	£267.09
600	400	3062204	640	2184	£146.10
	600	3062206	961	3280	£165.29
	800	3062208	1281	4372	£184.47
	1000	3062210	1601	5464	£203.66
	1200	3062212	1921	6556	£222.83
	1400	3062214	2241	7649	£242.03
	1600	3062216	2563	8744	£261.22
	1800	3062218	2883	9836	£280.38
	2000	3062220	3203	10928	£299.57

Btu/hr @  $\Delta t50^{\circ}\text{C}$

## Technical information

### Testing and Operating Pressures

Henrad Everest Line has been independently tested to ensure these radiators perform to a maximum working pressure of 8.0 bar.

### Connections

Henrad Everest Line has 4 x 1/2" BSP connections as standard.

### Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL A9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

### Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

### Warranty

Henrad Everest Line comes with a 5 year manufacturer's warranty.

Henrad (UK) Limited, Marriott Road,  
Mexborough, South Yorkshire S64 8BN.  
Telephone: 0844 543 6200 Facsimile: 0844 543 6300


[www.henrad.co.uk](http://www.henrad.co.uk)

## Henrad Everest Line


### Wall Mounting Information

All dimensions in mm.

T11

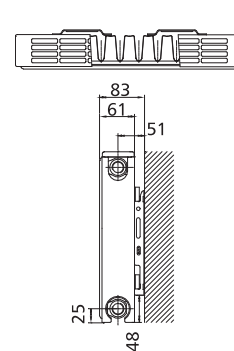


T22

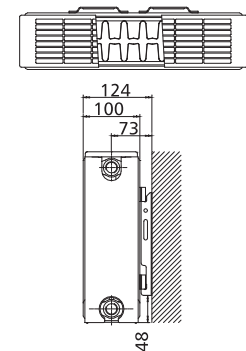

### Mounting Bracket Information

All dimensions in mm.

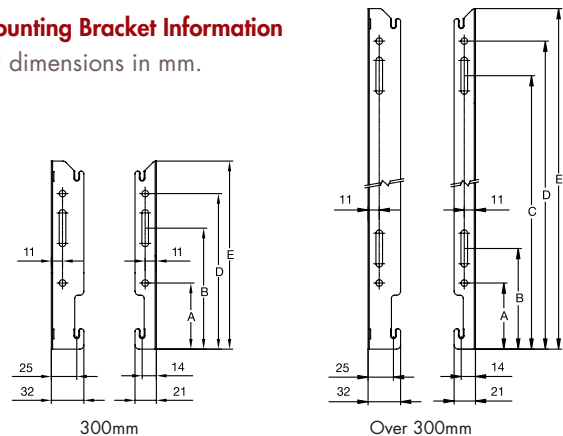


All dimensions in mm.

Height	500	600
A	65	65
B	99	99
C	319	419
D	333	453
E	385	485

### T11 & T22 Lug Positions

All dimensions in mm.



Panel Height	D
mm	mm
500	355
600	455

T22	T11
Dimensions	Dimensions
mm	mm
A	133 A 400mm
B	60 A 500 - 3000mm
	B 400 - 3000mm
	C 1800 - 3000mm
	17