



Verona Vertical Concept Single

Height mm	Length mm	Heat emissions		
		UIN	Watts	Btu/hr
1800	444	248652	852	2907
	592	248653	1136	3876
	740	248654	1420	4845

Btu/hr @ $\Delta t 50^{\circ}\text{C}$

Verona Vertical Concept Double

Height mm	Length mm	Heat emissions		
		UIN	Watts	Btu/hr
1800	444	248655	1254	4279
	592	248656	1672	5705
	740	248657	2090	7131

Btu/hr @ $\Delta t 50^{\circ}\text{C}$



Verona Vertical Concept is only available
in Slate grey RAL 7015.

For technical and installation information
visit our website www.henrad.co.uk/downloads

Technical information

Testing and Operating Pressures

Henrad Verona Vertical Concept has been independently tested to ensure these radiators perform to a maximum working pressure of 4.0 bar.

Connections

Henrad Verona Vertical Concept has 2 x 1/2" BSP connections (BOE) as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Slate grey (RAL A7015) which is stoved and cooled to give a perfect finish.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty



Henrad Verona Vertical Concept comes with a 5 year manufacturer's warranty.

Henrad Verona Vertical Concept

Wall Mounting Information

All dimensions in mm.

EN 442 Certification Data - CETIAT Tested in Accordance with BS EN 442

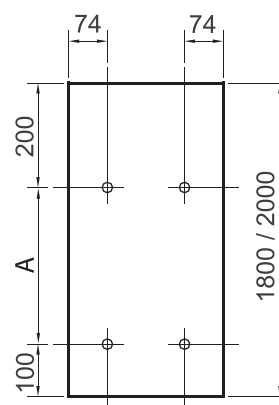

Height	Width	A
1800	444	1500
1800	592	1500
1800	740	1500
2000	444	1700
2000	592	1700
2000	740	1700

