

Prices
exclude
VAT

Verona Lo-Line Double Convector Type 22

Height mm	Length mm	Henrad Code	Heat emissions		Henrad Price
			Watts	Btu/hr	
148	800	248581	530	1809	£224.76
	1400	248311	946	3228	£297.49
	2000	248314	1352	4613	£376.81
	2200	248315	1487	5074	£403.25
296	800	248316	898	3064	£381.97
	1400	248319	1571	5360	£477.46
	2000	248322	2244	7657	£603.62
	2200	248323	2453	8370	£614.80

Btu/hr @ $\Delta t 50^{\circ}\text{C}$

Working pressure:
Tested to withstand 4.0 bar



For technical and installation
information visit our website
www.henrad.co.uk/downloads



Floor mounting bracket information

Length mm	Feet Required
400 - 1500	2
1600 - 3500	3

Optional extra to have no lugs. This needs specifying at the time of ordering for floor standing only.

Technical information

Testing and Operating Pressures

Henrad Verona Lo-Line has been independently tested to ensure radiators perform to a maximum working pressure of 4.0 bar.

Connections

Henrad Verona Lo-Line has 2 x 1/2" BSP connections (BOE) as standard.

Paint Process

Two coat paint process, each Henrad radiator is subjected to a multi-stage cleaning and paint process.

The final powder coat is Traffic white (RAL 9016) which is stoved and cooled to give a perfect finish. All radiators are illustrated in Traffic white unless stated.

Water Treatment

Installation of the system should be properly flushed and fitted in accordance with the British Code of Practice for the Treatment of Water in Domestic Hot Water Central Heating Systems.

Warranty

Henrad Verona Lo-Line comes with a 5 year manufacturer's warranty.

Henrad (UK) Limited, Marriott Road,
Mexborough, South Yorkshire S64 8BN.
Telephone: 0844 543 6200 Facsimile: 0844 543 6300


www.henrad.co.uk

Henrad Verona Lo-Line

Wall Mounting Information



All dimensions in mm.

Verona Lo-Line





Horizontal radiator - Plinth	
Height	Width
148	500 to 2200
296	

148

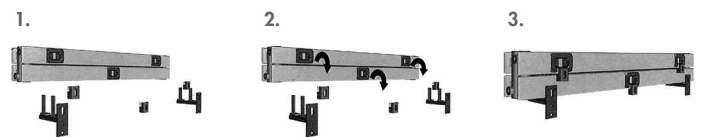

296

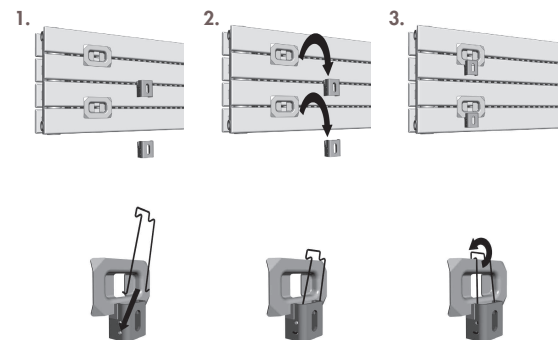

Optional mounted feet

